


PKM-300 / PKM-325

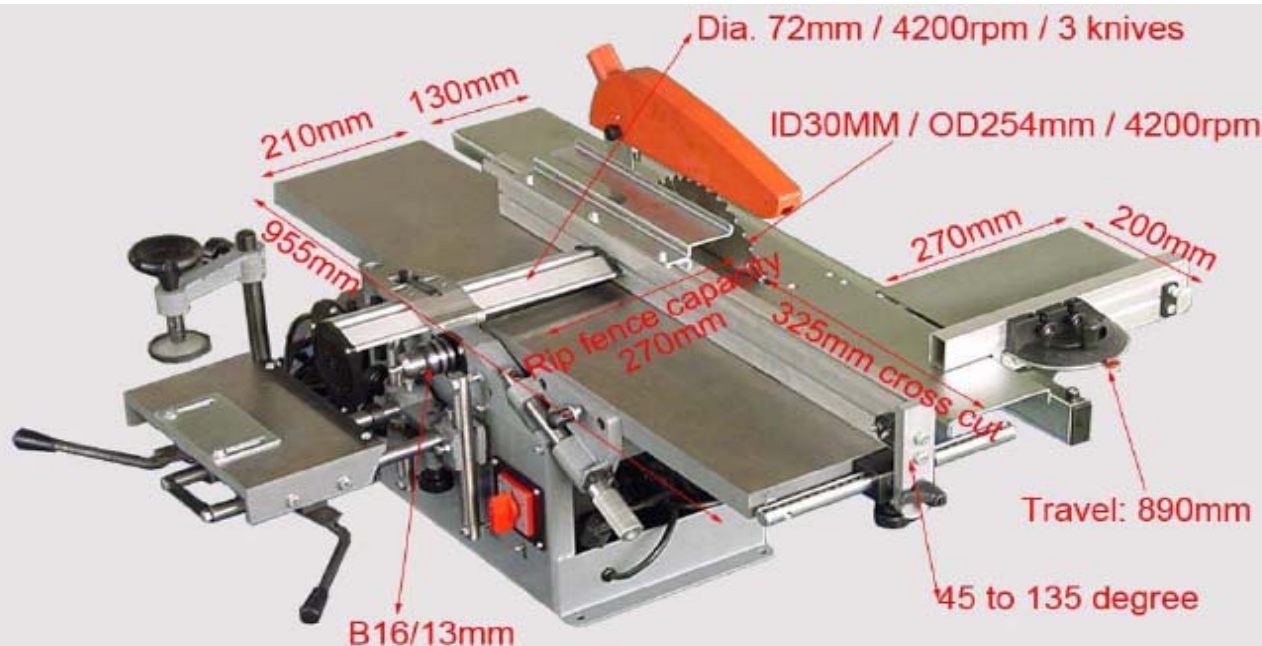

PKM-300 / PKM-325 COMBINATION MACHINE (CIRCULAR SAW, JOINTER, MORTISER)

Standard equipment

- ◆ 40 tooth carbide tipped sawblade dia 254 mm
- ◆ 3 high speed steel knives (installed)
- ◆ Universal rip fence, +/-45° tiltable
- ◆ Sliding table with miter fence
- ◆ Sawguard
- ◆ Bridge type cutterblock guard
- ◆ Mortising unit with workpiece hold-down
- ◆ Drillchuck 1-13mm / B16

| Stock number 230V Model | 93000.13000 PKM-300 | 93000.13100 PKM-325 |
|-------------------------|---------------------|---------------------|
|-------------------------|---------------------|---------------------|

| Circular Saw | | |
|-------------------------------------|--------------------|--------------------|
| Blade diameter | 254 mm | 254 mm |
| Blade bore | 30 mm | 30 mm |
| Blade speed | 4200 rpm | 4200 rpm |
| Table size | 955 x 130 (380) mm | 955 x 130 (380) mm |
| Max rip capacity | 270 mm | 270 mm |
| Sliding table | 200 x 270 mm | 200 x 270 mm |
| Sliding table travel | 890 mm | 890 mm |
| Max cross cut in front of saw blade | 325 mm | 325 mm |
| Jointer | | |
| Cutting width | 200 mm | 200 mm |
| Cutter head speed | 4200 rpm | 4200 rpm |
| Cutter head diameter | 72 mm | 72 mm |
| Number of knives | 3 | 3 |
| Knife size | 200 x 3 x 20 mm | 200 x 3 x 20 mm |
| Max depth of cut | 3 mm | 3 mm |
| Table size | 955 x 210 mm | 955 x 210 mm |

| Stock number 230V Model | 93000.13000 PKM-300 | 93000.13100 PKM-325 |
|-------------------------|---------------------|---------------------|
|-------------------------|---------------------|---------------------|

| Mortiser | | |
|--------------------------|------------------------------|------------------------------|
| Drill chuck capacity | 1-13 mm | 1-13 mm |
| Table size | 280 x 160 mm | 280 x 160 mm |
| Max. mortise length | 100 mm | 100 mm |
| Max. mortise depth | 90 mm | 90 mm |
| Max. mortise above table | 60 mm | 60 mm |
| Electrics | | |
| Electrical version | 230V, 50 Hz, 1 Phase | 230V, 50 Hz, 1 Phase |
| Motor power output | 2 HP S ₁ -100 % | 2,4 HP S ₁ -100 % |
| Motor power input | 2,1 kW S ₁ -100 % | 2,5 kW S ₁ -100 % |
| Motor power input | 3,5 HP S ₆ -40 % | 4,2 HP S ₆ -40 % |
| Dimension (LxWxH) | 1070x1150x530 mm | 1070x1150x530 mm |
| Weight | 90 kg | 92 kg |